




SS-M-180 to 220 (24V)Series

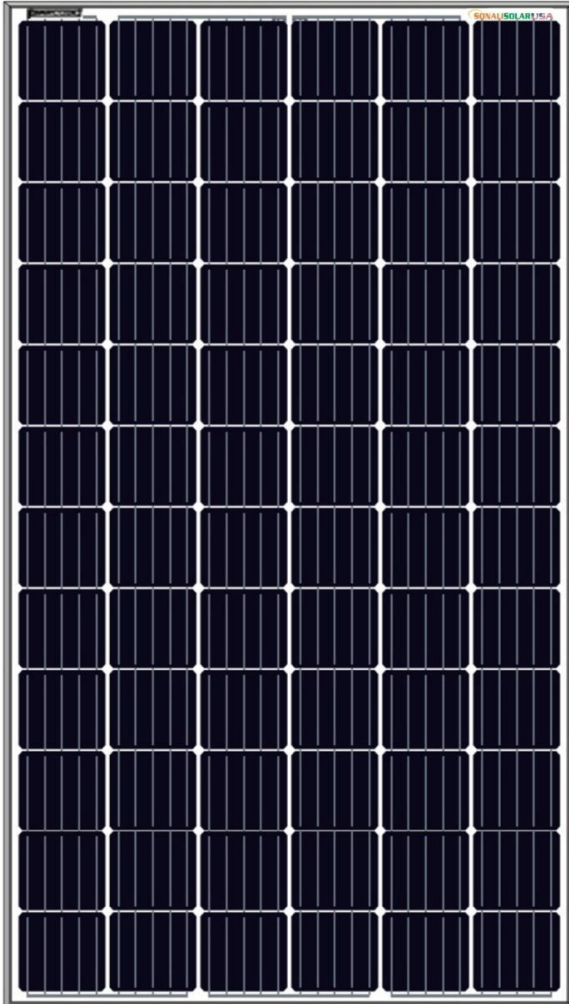

Quality Product

All Manufactured modules are tested 100% by EL (Electroluminescence) during the Production Process & Free from micro cracks.

Our high-performance modules are highly efficient, reliable and provide optimal output.

The company manufactures solar modules in compliance with global standard including IEC 61215, 61730-1, 61730-2, 61701, UL 1703, UL 61730, ISO 9001:2008 & ISO 14001:2004 & 18001:2007.

High Efficiency .

High Module efficiency is obtaining top performance even in diffused light conditions.

We are leaders in providing our customers with maximum sunlight conversion.

Application Possibilities

Residential and Commercial rooftops, Car ports, Solar Farming, Balconies, Awnings, Street lights, Fences, and Canopies.

Our Team

We have a team of qualified experts and engineers making sure that modules produce maximum power.

We pride ourselves in caring for each individual customer needs with detailed attention. Our end goal is to give a highly efficient product with exceptional customer service.

Guarantee

Our product is durable and has 25 years performance warranty. Integrated manufacturing of cells & modules in production line guarantees optimum performance.

US OFFICE:

Sonali Energies USA LLC
111 Charlotte Place Suite 101A
Englewood Cliffs, NJ 07632
Office Tel: 201-568-1424





SS-M-180 to 220 (24V)Series

Electric Performance Parameter

Model	SS-M-180	SS-M-185	SS-M-190	SS-M-195	SS-M-200	SS-M-210	SS-M-215	SS-M-220
Nominal Maximum Power (Pmax/W)	180	185	190	195	200	210	215	220
Optimum Operating Voltage (Vmp/V)	36.02	36.38	36.74	37.1	37.46	37.83	37.65	37.81
Optimum Operating Current (Imp/A)	5.00	5.09	5.17	5.25	5.34	5.55	5.71	5.82
Open Circuit Voltage (Voc/V)	44.88	45.12	45.37	45.62	45.87	45.47	46.21	47.33
Short Circuit Current (Isc/A)	5.31	5.39	5.47	5.55	5.63	6.32	6.08	6.2

* Measurement Power Tolerance on Power 0 / +%

* Under Standard Test Conditions (STC) of irradiance of 1000W/m²

* Maximum System Voltage: 1500v IEC/UL

* Normal Operating cell Temperature (NOCT) of irradiance of 800W/m², 43± 2° C

* Spectrum AM 1.5 and cell temperature of 25 °C

* Wind Load 3600 pa & Mechanical Load 5400 pa

Mechanical Parameter

Module Dimensions	1580 X 808 X 35 mm / 62.20 X 31.81 X 1.38 inch
Weight	15.6 kgs /34.4 lbs
Cell Size (Monocrystalline)	125x125mm / 5x5 in
No Of Cell	72 (12 X 6)
Junction Box	IP67, 3 Bypass diodes
Solar Cable Length (4mm ²)	900mm (35.43inch)
Connectors	MC4 compatible / IP67
Glass (Tempered & Low Iron)	3.2mm (0.125in) ARC
Encapsulate	EVA
Back Cover (White Color)	Composite Sheet
Frame (Silver Color)	Anodized Aluminum Alloy

Temperature Coefficient

Coefficient of Current	+0.04% /°C
Coefficient of Voltage	-0.32% /°C
Coefficient of Power	-0.43% /°C


Tested Operating Conditions

Temperature Cycling Range	-40°C to 85°C
Humidity Freeze, Damp Heat	85% RH

Product Warranty

Product Warranty	25 Years
Linear Performance Warranty	First 10 Years up to 90%, next 15 years up to 80%

Module Drawing

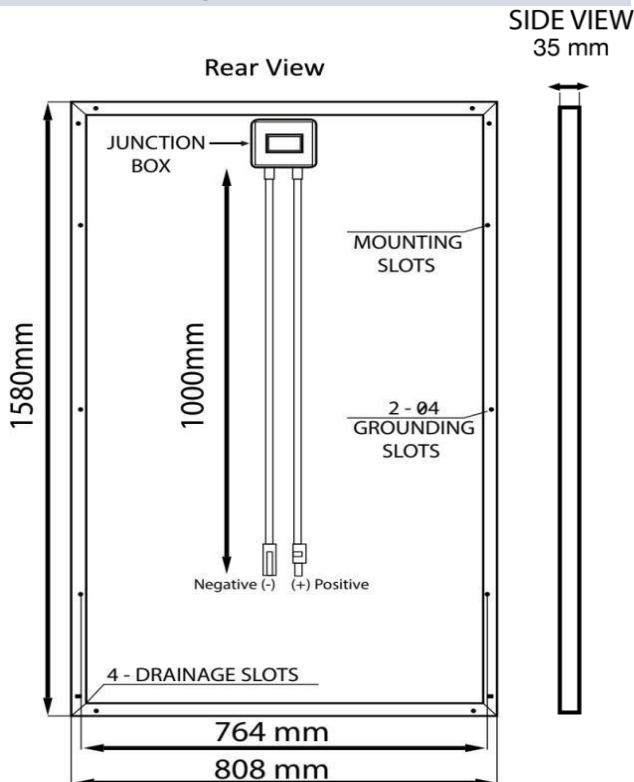

IV Curve

